

XE150E

Hydraulic Excavator



Advanced Configuration

Ecological and economical

- ▶ High-power engine is more fuel saving
- ▶ New Japan Kawasaki main pump can ensure high efficiency and reduced leakage
- ▶ Efficiency main valve increases overflow pressure and reduces pressure loss
- ▶ Smart matching technology ensures higher operating efficiency and lower fuel consumption,

Multiple application

- ▶ Variety of boom, stick and bucket matching to maximize utilization in different conditions;
- ▶ Multi-functional intelligent work tool control system can meet different operating requirements such as digging, breaking and dismantling
- ▶ Instantaneous pressurization function copes with complex working conditions.

Comfortable operating experience

- ▶ Air Conditioner and Heater with Double stage air filter ensure the appropriate temperature
- ▶ Silicone rubber shock absorber is adopted in the cab
- ▶ Air-suspending seat equipped with electric heating function
- ▶ Integrated control panel and large display screen provide multiple information
- ▶ ROPS and FOPS Cab can improve cab safety

Excellent after-sales service

- ▶ Global after-sales service system and quick response mechanism
- ▶ Real-time technical consultation and maintenance

Convenient maintenance

- ▶ Easy maintenance design concept makes your maintenance done without dead angle
- ▶ Maintenance-free air prefilter

Safe and durable

- ▶ Whole brazing technology improves lifespan
- ▶ Upgrade undercarriage structure to improve load bearing performance
- ▶ Strengthened key stress-bearing parts of chain links



Ecological And Economical

- ▶ Adopting a new generation of Cummins high-pressure common-rail EFI engine, tailored according to the excavator working conditions, features low speed, high torque, strong power, large power reserve, low fuel consumption and low noise.
- ▶ New Japan Kawasaki main pump is fully upgraded with large displacement, which is 7% higher than that of the previous generation. It can ensure high efficiency and reduced leakage under the same pressure. Swashplate swing angle increases power density greatly.
- ▶ Equipped with new generation of high efficiency main valve with the functions of confluence and regeneration, the overflow pressure is increased, the pressure loss is smaller, and the working ability is more outstanding.
- ▶ Smart matching technology, the machine can achieve higher operating efficiency and lower fuel consumption, and its fuel efficiency ratio is ahead of the same tonnage models. After continuous optimization and improvement of the hydraulic system, the control performance is further strengthened, maneuverability is more refined, and leveling and loading performance is better.



Comfortable And Safe

Comfortable

- ▶ Brand-new air conditioner and heater: Indoor and outdoor ambient temperature can be perceived through sensors and automatically adjusted to comfortable temperature. A good comfortable environment for operators can be provided with the cooperation of a multi-position adjustable air outlet.
- ▶ With new seat adjustment mode, the new air suspension seat based on ergonomics, can realize 7 kinds of postures including front and rear adjustments, high and low adjustments, backrest, headrest and handrails, it can also adjust the seat height automatically according to the operator's weight, which will greatly improve the comfort.
- ▶ The newly designed cab has a wide view, lower noise, and more user-friendly operation buttons to provide a more comfortable working environment.


Safe

- ▶ Optional ROPS and FOPS device and protective net can improve cab safety.
- ▶ The cab is structurally reinforced and the seat is equipped with safety belts.
- ▶ Middle-position startup function can avoid mis-operation; standard equipped rear video function which improves operation safety; the monitor which will give audible and visual alarm when fault occurs; running alarm function.
- ▶ Equipped with fire extinguisher, safety escape hammer and anti-skid device.



Reliable And Durable


- ▶ Adopting whole brazing technology and new-type radiator welded by robots, and configuring positive pressure degassing type expansion tank, to improve the pump life, which can quickly remove the gas within engine and waterway, reduce the rust and meet 50℃ environmental operating requirements.
- ▶ The turntable adopts a rigid box structure to provide higher strength and improve the cab shock absorption ability. The engine mounting base structure is strengthened to improve shock absorption.
- ▶ With main body adopting I-beam rigid structure, the whole machine's strength is intensified, and the turntable side beam adopts the D-tube structure to improve its ability to resist external impact.
- ▶ The travelling mechanism adopts strengthened key parts of the chain rails bearing stress to improve the strength and impact resistance of the chain rails, and the service life of the track is greatly improved. With strengthened X-beam section, and the strength of the end face is greatly improved by increasing the size, thickness and structure of the box beam.
- ▶ The working equipment adopts the casting type single connecting rod to fully optimize the stress distribution, which greatly improves the reliability. The boom arm shaft seat adopts the forging-type shaft seat, and higher wear resistance can be achieved through the quenching and tempering treatment.
- ▶ Replace the XCMG new second generation bucket to make the force more reasonable and increase the durability.

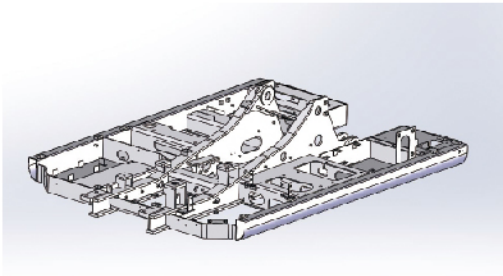

Multiple application conditions

- ▶ The independently developed multi-functional intelligent work tool control system can be widely used for irrigation and water conservancy, river dredging, municipal construction and small mine construction. It can meet different operating requirements such as digging, breaking and dismantling, and its working condition adaptability is further strengthened.
- ▶ The design has the function of instantaneous pressurization. By means of the pressurization button on the handle, the rising speed of the boom or the traction force of walking can be increased instantaneously, so as to cope with complex working conditions.

- ▶ The new control system uses CAN bus, the monitor is responsible for display, the controller is responsible for signal acquisition and output, and the bus connects with monitor, GPS controller, engine ECM, which can achieve faster data management and more efficient control.

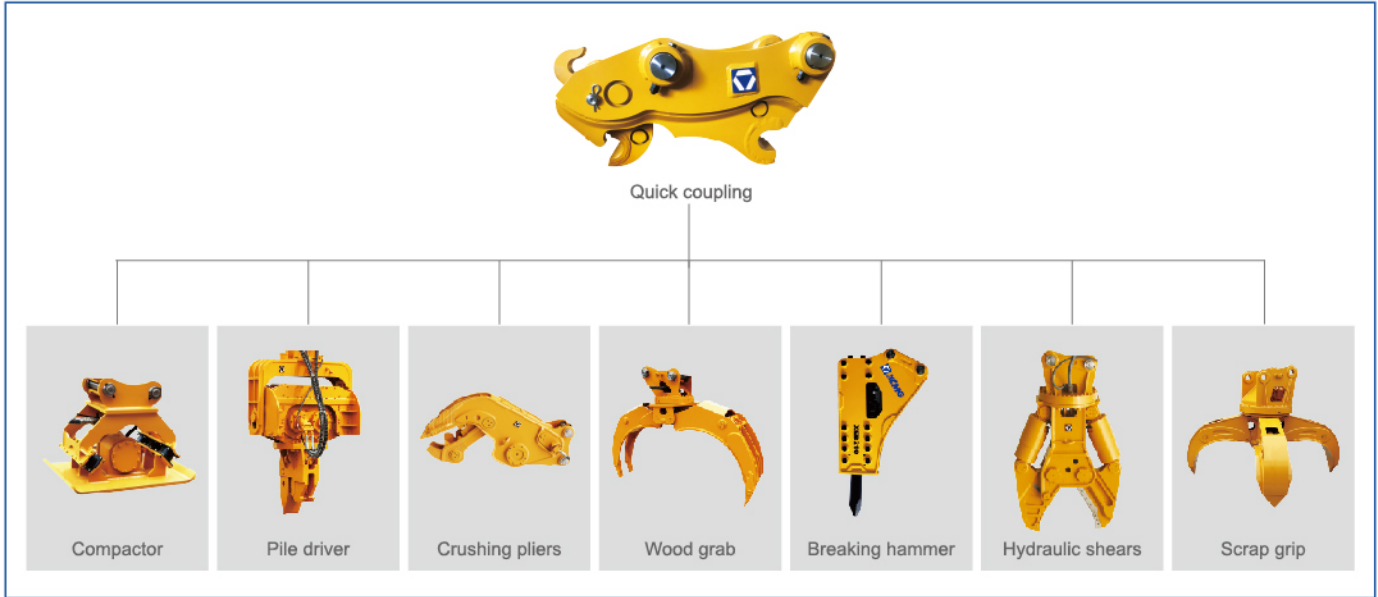

Maintenance And Service

- ▶ Daily maintenance points such as fuel pre-filter, fuel filter, oil filter, pilot filter, air filter and electrical box are accessible on the ground level, saving time and effort, and safer.
- ▶ The inverted visual fuel pre-filter can keep track of the filter element status, and can also discharge the gas in the pipeline to reduce the damage to the high-pressure fuel pump. The large-displacement manual pump is easier to operate and pump the oil much faster.
- ▶ The air conditioning system drying bottle is integrated on the condenser to reduce the leakage points of the refrigerant, and the disassembly is convenient and easy to replace.
- ▶ Fuel breather valve is standard equipped to keep the tank pressure stable, effectively filter dust, and ensure the oil quality.
- ▶ A wide range of after - sales service system and quick- response rescue mechanism can ensure that you use machine at ease.



XE150E is suitable for complex earth and rock working conditions. With Cummins powerful engine, which is energy-efficient and matched the best fuel economy adjustment, the efficiency of this engine can be greatly improved. The main valve of the main pump adopts imported original parts, which ensures the reliability and durability of the product. Structured design of the working device and chassis to make its strength withstand any test, and finally it is matched XCMG's latest XEICS intelligent control system and integrated cab, so that operators more comfortable, safer and labor-saving. This excavator is mainly used in road, municipal and other light urbanization open-air operations.



Standard Equipment

Engine	Name of equipment	XE150E
	Engine model	QSB4.5
	Emission level	Stage IV
	Automatic preheating	
	Oil-water separator with water level indication sensor	
	Radial seal air cleaner	
	Air prefilter	
	50°C high temperature ambient cooling assembly	
	Radiator dust screen	
	Fuel marker	
Hydraulic system	Oil-water quick release device	
	Fuel breather valve	
	Air pressure difference indicator	
	Automatic idle speed	
	Boom/arm flow regeneration	
	Auxiliary hydraulic valve	
	Reverse rotation damping valve	
	Automatic rotation parking brake	
	Hydraulic buffer valve	
	Straight hydraulic circuit	
	Boom priority valve	
	Rotary logic valve	
	Hydraulic oil ISO VG 46	
	Hydraulic pipeline: breaking hammer and thumb clamp	
	Operation mode switching	
	Rotary anti-sway valve	
	Spare valve plate	

Hydraulic system	Gauge pressure monitoring
	Pressurized cab
	Adjustable seat armrest
	Seat belt (51 mm [2 "] wide)
	Openable windscreen with auxiliary device
	Front windshield divided by 70/30 ratio
	Double laminated windshield and other toughened windows
	Sliding door upper window
	Bi-directional air outlet air conditioner with defroster (automatic type) (pressurization function)
	Color liquid crystal display capable of displaying warning information, filter / liquid replacement information and working hours
Cab and interior trim	Control handle
	Travel control pedal with detachable manual control lever
	Two stereo speakers
	Beverage cup holder
	Coat and hat hook
	Cleanable floor mat
	Air conditioning system
	High and low gears shift
	One-key boost mode
	Top sunroof
Safety and security configuration	Intermittent multi-gear wiper
	Cup holder/envelope
	Cold and warm storage box
	Radio receiver
	Driving door locks and cabin locks
	Alarm horn
	Isolation plate between engine and oil pump chamber

Safety and security configuration	Engine Emergency Stop Switch
	Rear window emergency exit
	Battery circuit breaker
	Boom and arm retaining valve
	Explosion-proof valve for boom and arm pipeline
	Overheat alarm
	Safety handrails and pedals
	Rotary alarm lamp
	Anti-skid plate/anti-skid paste
	Hydraulic safety locking lever
	Emergency escape hammer
	Roll over protection structure (ROPS)
Chassis system and shield	Falling object protection structure (FOPS)
	Track single rail protector
	Bottom frame traction ring
	600 mm (24 ") three-rib track shoe
	Protective device kit: chassis bottom sealing plate, walking motor sealing plate
Equipment	Boom
	Arm 2.964 m
Electrical system	Bucket 0.61M3 Strengthening Bucket
	Battery (2× 750CCA)
	70A alternator
	4.8 kW starter motor
	Travel alarm
	12V cigarette lighter

Electrical system	Camera
	5V USB interface
Lighting lamp	Right and left boom work lights
	Right working light installed on storage box
Counterweight	Cab interior lighting
	2.95 t counterweight
Technology	XEICS intelligent control system
	Data link socket

Optional Equipment

	Name of equipment	XE150E
Engine	Oil-water separator with heater (24V)	
Hydraulic system	Hydraulic oil ISO VG 32, 68	
Cab and interior trim	Retractable seat belt (51 mm [2 "] wide)	
	Vehicle mounted oxygen supply device	
	Fire extinguisher	
	Reserve switch for working aids	
Chassis system and shield	Electric sunshade curtain	
	600 mm (24 ") three-rib track shoe	
	800 mm (31 ") three-rib track shoe	
	Track rubber block	
Equipment	Arm 2.1/3.01 m	
	0.52m3 Strengthened bucket	
	0.3/0.4/0.7 m3 Earthwork bucket	
	Quick coupler	
	Hydraulic breaker	

Equipment	Hydraulic thumb pliers
	Vibratory plate compactor
	Hydraulic shear
	Grapples
	High frequency crusher
	Clamp shell bucket
	Screening bucket
Electrical system	Pipe grab
	24V cigarette lighter
Electrical system	Front working light installed on cab top
	Rear working light installed on cab top
Lubrication system	Arm concentration


Main Specifications

Item	unit	Main specifications
Model	/	XE150E
Operation weight	Kg	14800
Bucket capacity	m³	0.32~0.72
Engine	Model	Cummins QSB4.5
	Electronic injection	√
	Four strokes	√
	Water cooling	√
	Turbocharging	√
	Air-to-air intercooler	√
	No.of cylinders	4
	Rated power	kw/rpm 90/2200
	Maximum torque/speed	N.m/rpm 470/1500
	Displacement	L 4.5

Item	unit	Main specifications
Main performance	Travel speed	km/h 5.3/3.2
	Swing speed	r/min 11.7
	Gradeability	° ≤35
	Ground pressure	kPa 38
	Bucket digging force	kN 106.9
	Arm digging force	kN 73.4
	Maximum tractive force	kN 134
Hydraulic system	Main pump	/ 2
	Rated flow of main pump	L/min 2×123.5
	Main safety valve pressure	MPa 34.3/37
	Travel system pressure	MPa 34.4
	Swing system pressure	MPa 25
	Pilot system pressure	MPa 3.9
Oil Capacity	Fuel tank capacity	L 260
	Hydraulic tank capacity	L 105
	Engine oil capacity	L 11
Standard	Length of boom	mm 4600
	Length of arm	mm 2520
	Bucket capacity	m³ 0.61
Optional	Length of boom	mm --
	Length of arm	mm 2100/3010
	Bucket capacity	m³ 0.52 (Rock bucket) 0.52 (Strengthened bucket) 0.32/0.4/0.72 (Earthwork bucket)


Dimensions

	Item	Unit	Parameters
Apperance size	A Overall length	mm	7806
	B Overall width	mm	2590
	C Overall height	mm	2900
	D Width of platform	mm	2490
	E Track length	mm	3658
	F Total Width of Chassis	mm	2590
	G Track shoe width	mm	600
	H Crawler base	mm	2910
	I Track Gauge	mm	1990
	J Counterweight Clearance	mm	942
	K Minimum Ground Clearance	mm	476
	L Minimum Tail Swing Radius	mm	2355
	M Track Height	mm	836

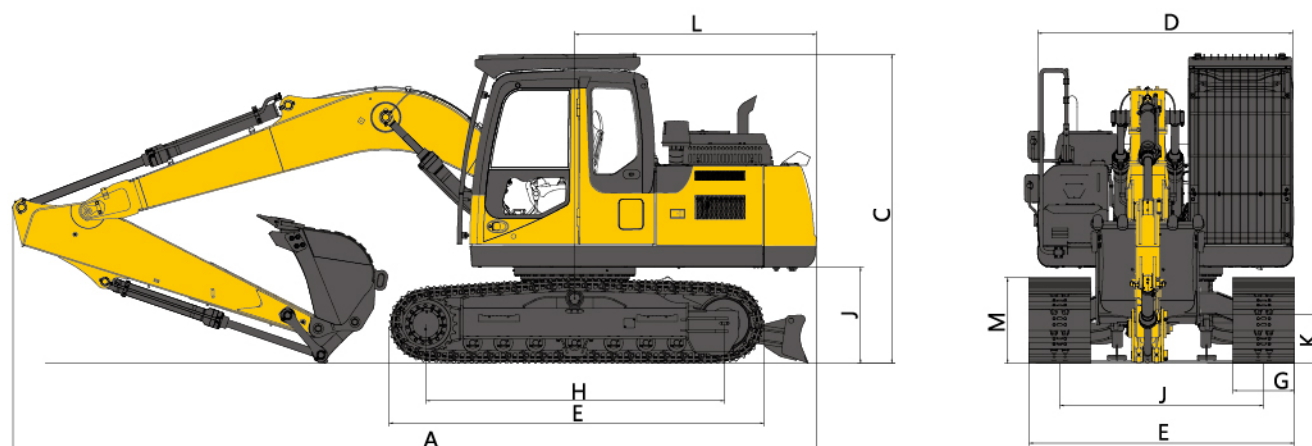

Working Range

	Item	Unit	Parameters
Working scope	A Max. digging height	mm	8640
	B Max. dumping height	mm	6180
	C Max. digging depth	mm	5520
	D Maximum depth cut for 2240mm(8 ft) level bottom	mm	5324
	E Maximum vertical wall digging depth	mm	4697
	F Max. digging radius	mm	8304
	G Min. swing radius	mm	2445

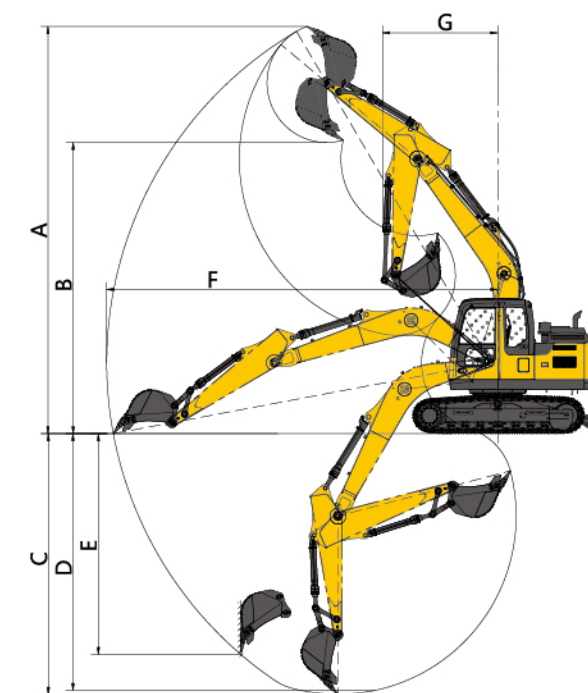

Lifting Capacity

Lifting point height (m)	Rated lift capacity – Straight ahead (back) (kg)					Rated lift capacity – over-side (kg)				
	Lifting point radius (m)				Lifting capacity at maximum radius	Lifting point radius (m)				Lifting capacity at maximum radius
	1.5	3	4.5	6		1.5	3	4.5	6	
6			*3242		*2593			*3242		*2593
4.5			*3438	*3371	*2404			*3438	2593	2357
3		*5662	*4186	*3592	*2398		*5662	3869	2523	2040
1.5		*8117	*5097	3738	*2531		6427	3623	2421	1925
Ground		*7128	5569	3647	*2832		6123	3448	2338	1948
-1.5	*4953	*8647	5496	3618	3353	*4953	6092	3384	2312	2155
-3	*9054	*7392	*5015		*3886	*9054	6195	3429		2734

Capacities marked with an asterisk(*) are limited by hydraulic capacities.



Machmall.com is an electromechanical product platform officially launched by XCMG, aiming to provide global customers with a complete set of high-quality construction machinery solutions and supporting equipment.

Xuzhou Construction Machinery Group Co., Ltd. (XCMG Group), founded in 1943, is the fourth largest worldwide construction machinery manufacturer and the largest in China with products covering 183 countries and regions.

XCMG have 12 complete solutions: Crane lifting, Mining Construction, Earth-moving Solutions, Road Machinery, Concrete Equipment, Tunnel and Underground Space Construction, Mobile Elevating Work Platform (MEWP), Piling and Non-excavation Equipment, Transportation Equipment, Environmental Sanitation Equipment, Firefighting, Safety and Emergency Rescue

徐工徐工，助您成功

— XCMG for your success —



<https://www.machmall.com/>



machmall@xcmg.com



008618652183963
86-516 8773 9797

