



XS163J

SINGLE DRUM VIBRATORY ROLLER

单钢轮振动压路机

XS163J Single drum vibratory roller has a very high static line load and exciting force and is suitable for the compaction operation of pebbles, sandy soils, moraine soil, blasting rock and clayey soil, etc. and it is also suitable for the compaction of concrete and stabilized soil base materials in various large projects; Thus, it is a kind of important compaction equipment in the construction of large projects such as the expressway, railway, mine, port, etc.

XS163J振动压路机具有很高的静线载荷和激振力，适用于卵石、砂性土壤、冰碛土、爆破岩石和粘性土壤等的压实作业，也适用于各种大型工程中对混凝土、稳定土基础材料的压实；是高速公路、铁路、矿山、港口等大型工程施工中重要的压实设备。

Performance Characteristics / 性能特点

- Use the H-series, water-cooling, four-cylinder four-stroke, direct injection turbo charged and air-air intercooling low-speed diesel engine manufactured by Shanghai Diesel Engine Co., Ltd. This kind of diesel engine has a large power reserve and has the function of energy saving and noise reduction. Engine fulfills the requirements of China stage II emission standards.
- Rear drum hydraulic drive, adopt closed hydraulic drive system composed of variable displacement piston pump and piston motor to ensure better drive performance and gradeability.
- Use the mechanical gear box with synchro mesh unit to realize convenient operation.
- Main clutch uses the heavy-duty special clutch which is the dry type normally combined friction clutch with a reliable performance and good maintainability. Clutch is directly installed on the engine flywheel, and the operation mechanism of main clutch is the air assisted mechanism which greatly reduces the operating force.
- Double frequency and double amplitude can meet the requirements of different working conditions; hydraulic vibration system consists of gear pump and motor to form an open system; its control mode is electronic control. Guarantee the demand of vibration parameter and reliability of vibration system.
- Optimized vibration drum structure and vibration parameters to guarantee smoother compaction surface and higher compaction efficiency.
- 采用上柴H系列、水冷、四缸四冲程、直喷式涡轮增压，空空中冷低转速柴油机，功率储备大，节能降噪。发动机排放满足中国II阶段标准。
- 后轮液压驱动，采用柱塞变量泵和柱塞定量马达组成的闭式液压系统，压路机具有良好的驱动性能。
- 采用带换挡同步器的机械变速箱，操纵轻便。
- 主离合器采用重型专用离合器，为干式带结合单片磨擦式，性能可靠，维修性好。离合器直接安装在发动机飞轮上，主离合器的操纵机构为气助力机构，极大减小了操纵力。
- 双频双振幅，满足不同工况要求；液压振动系统由齿轮泵、马达组成开式系统；控制形式采用电控。确保振动参数的需求及振动系统的可靠性。
- 优化的振动轮结构和振动参数，压实表面更平整，压实效率更高。


XS163J

SINGLE DRUM VIBRATORY ROLLER

单钢轮振动压路机

Main Dimensions

主要尺寸

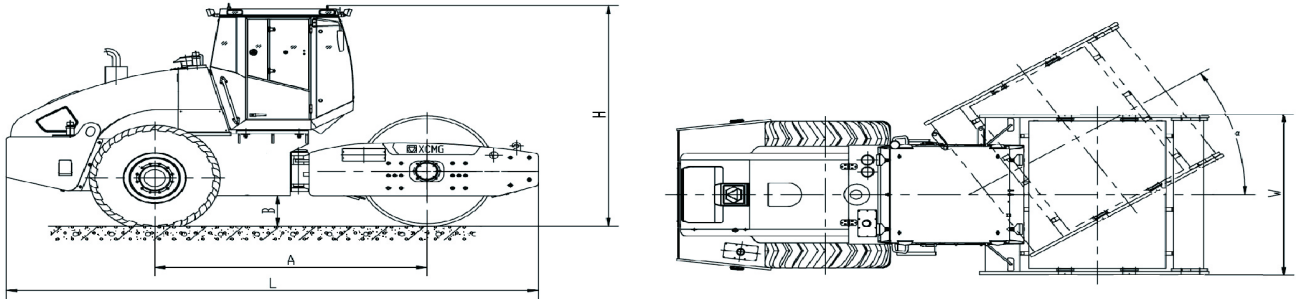

Dimension 尺寸(mm)	A	B	H	L	W	β
XS163J	3076	431	3200	6150	2300	33°

Main Specifications

主要技术参数

Item	项目	单位 Unit	XS163J				
Service mass	工作质量	kg	16000				
Distributed mass of driving wheel	驱动轮分配质量	kg	8000				
Distributed mass of vibration wheel	振动轮分配质量	kg	8000				
Static line load	静线载荷	N/cm	376				
Vibration frequency	振动频率	Hz	28/33				
Theoretical amplitude	理论振幅	mm	1.9/0.95				
Exciting force	激振力	kN	290/200				
Range of speed	Forward	I	速度范围	前进	I	km/h	2.93
		II		前进	II	km/h	5.76
		III		前进	III	km/h	12.2
	Backward	I	速度范围	后退	I	km/h	2.93
		II		后退	II	km/h	5.76
		III		后退	III	km/h	12.2
Wheel base	轴距	mm	3076				
Compaction width	压实宽度	mm	2130				
Theoretical gradeability	理论爬坡能力	%	30				
Minimum turn radius	最小转弯半径	mm	6800				
Tire specification	轮胎规格		20.5-25-16PR				
Diameter of vibration wheel	振动轮直径	mm	1523				
Minimum ground clearance	最小离地间隙	mm	431				
Engine	Model	发动机	型号	SC4H140.1G2			
	Rated speed		额定转速	r/min	1800		
	Rated power		额定功率	kW	103		
Overall dimension (length × width × height)	外型尺寸(长×宽×高)	mm	6150 × 2300 × 3200				



CASE



 **XCMG** |  **Machmall.com**

Web: machmall.com

Tel: +86-516 8773 9797

E: machmall@xcmg.com



Machmall.com is an electromechanical product platform officially launched by XCMG, aiming to provide global customers with a complete set of high-quality construction machinery solutions and supporting equipment.


Xuzhou Construction Machinery Group Co., Ltd. (XCMG Group), founded in 1943, is the fourth largest worldwide construction machinery manufacturer and the largest in China with products covering 183 countries and regions.

XCMG have 12 complete solutions:Crane lifting, Mining Construction, Earth-moving Solutions, Road Machinery, Concrete Equipment, Tunnel and Underground Space Construction, Mobile Elevating Work Platform (MEWP), Piling and Non-excavation Equipment, Transportation Equipment, Environmental Sanitation Equipment, Firefighting, Safety and Emergency Rescue



 <https://www.machmall.com/>

 machmall@xcmg.com

 008618652183963
86-516 8773 9797